

## Application

Beam style	variable-spread, tight-edged beam
Suitable for	theatre, clubs, small stage areas
Specification level	economy range
Beam angle	7° - 58°
Typical throw distance	2 - 10m

## Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	650W
Lamp base	GY9.5
Auto-disconnect	no
Cable/connection	1.5m, 3x1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	55mm diameter glass
Lens	120mm diameter Pebble-Convex
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire
Rear handle	yes
Weight/Packed weight	4.2kg / 4.8kg
Packed volume	0.021m <sup>3</sup>
Filter cut size	150 x 150mm
Accessory runners	3 slots
Safety guard	included
Colour frame	metal, 150x150mm, supplied
Lamp access	sliding top cover
Lens access	front and via lamp access

## Operational specifications

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barndoor accessory
Positional adjustment	single rim-clamp tilt lock

## Lamp types

300W	M38 2950K 2000 hrs
500W	T18 3000K 360 hrs / T25 3000K 360 hrs / M40 2950K 2.000 hrs
650W	T26 3050K 600 hrs / T27 3050K 600 hrs

## LDR recommends Philips lamps

### Accessories

Spare metal colour frame	■ 20100103	□ 20100103B	■ 20100103C
Spare safety guard	■ 20100203	□ 20100203B	■ 20100203C
4-leaf barndoor	■ 20100303	□ 20100303B	■ 20100303C
	□ 20100303D	■ 20100303E	
Hook clamp	20100900	Alu-grip clamp	20101100
Safety bond	20101200		
Colour scroller Xpress 13	20106013 with mounting plate	20600003	

## Photometric data

Spot focus												T27
Beam dia.	0.2	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2	m		
lux	24800	11022	6200	3968	2756	2024	1550	1225	992			
Distance	2	3	4	5	6	7	8	9	10 m			


Flood focus											
Beam dia.	2.2	3.3	4.4	5.5	6.7	7.8	8.9	10	11.1 m		
lux	2148	955	537	344	239	175	134	106	86		
Distance	2	3	4	5	6	7	8	9	10 m		

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# tempo<sup>®</sup> pc 650 plus

650W pebble-convex

part number : ■ 10602000 □ 10602001 ■ 10602002

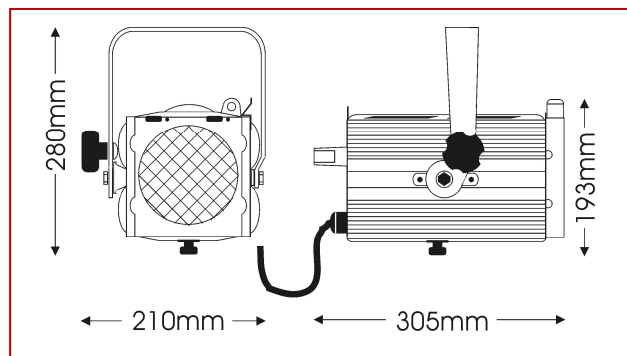

Simple yet high-quality 650W PC spotlight featuring a slide-focus variable-spread beam to offer more definition than the softer Fresnel beam.

Tempo pc650 plus is ideal for close projection in small stage venues and whenever budget is a priority. A colour frame, safety guard and 1.5m mains cable are all included as standard.

Available to special order in any colour from the RAL range



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2010. LDR reserves the right to alter the specification without prior notice.